

Cycoloy* Resin C2950

Europe-Africa-Middle East: COMMERCIAL

Non-chlorinated and non-brominated flame retardant PC/ABS offering balanced flow and impact plus improved heat resistance intended for various applications.

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
MECHANICAL			
Taber Abrasion, CS-17, 1 kg	54	mg/1000cy	SABIC Method
Tensile Stress, yield, 5 mm/min	55	MPa	ISO 527
Tensile Stress, break, 5 mm/min	45	MPa	ISO 527
Tensile Stress, yield, 50 mm/min	60	MPa	ISO 527
Tensile Stress, break, 50 mm/min	50	MPa	ISO 527
Tensile Strain, yield, 5 mm/min	4	%	ISO 527
Tensile Strain, break, 5 mm/min	65	%	ISO 527
Tensile Strain, yield, 50 mm/min	4	%	ISO 527
Tensile Strain, break, 50 mm/min	>50	%	ISO 527
Tensile Modulus, 1 mm/min	2800	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	90	MPa	ISO 178
Flexural Modulus, 2 mm/min	2700	MPa	ISO 178
Hardness, H358/30	116	MPa	ISO 2039-1
Hardness, Rockwell R	123	-	ISO 2039-2
IMPACT			
Izod Impact, notched 80*10*3 +23°C	50	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*3 -30°C	14	kJ/m ²	ISO 180/1A
Izod Impact, unnotched 80*10*4 +23°C	NB	kJ/m ²	ISO 180/1U
Izod Impact, unnotched 80*10*4 -30°C	NB	kJ/m ²	ISO 180/1U
Izod Impact, notched 80*10*4 +23°C	44	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*4 -30°C	14	kJ/m ²	ISO 180/1A
Charpy 23°C, V-notch Edgew 80*10*3 sp=62mm	50	kJ/m ²	ISO 179/1eA

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23±176;C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA All information, recommendation or advice given SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection

* Cycoloy is a trademark of SABIC Innovative Plastics IP BV

© 1997-2011 SABIC Innovative Plastics Holding BV.All rights reserved

Cycoloy* Resin C2950

Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
IMPACT			
Charpy -30°C, V-notch Edgew 80*10*3 sp=62mm	14	kJ/m ²	ISO 179/1eA
Charpy 23°C, V-notch Edgew 80*10*4 sp=62mm	45	kJ/m ²	ISO 179/1eA
Charpy -30°C, V-notch Edgew 80*10*4 sp=62mm	15	kJ/m ²	ISO 179/1eA
THERMAL			
Thermal Conductivity	0.2	W/m-°C	ISO 8302
CTE, -40°C to 40°C, flow	7.5E-05	1/°C	ISO 11359-2
CTE, -40°C to 40°C, xflow	7.5E-05	1/°C	ISO 11359-2
CTE, 23°C to 60°C, flow	8.E-05	1/°C	ISO 11359-2
CTE, 23°C to 60°C, xflow	8.E-05	1/°C	ISO 11359-2
Ball Pressure Test, 75°C +/- 2°C	PASSES	-	IEC 60695-10-2
Vicat Softening Temp, Rate A/50	118	°C	ISO 306
Vicat Softening Temp, Rate B/50	110	°C	ISO 306
Vicat Softening Temp, Rate B/120	112	°C	ISO 306
HDT/Be, 0.45MPa Edgew 120*10*4 sp=100mm	103	°C	ISO 75/Be
HDT/Ae, 1.8 MPa Edgew 120*10*4 sp=100mm	90	°C	ISO 75/Ae
Relative Temp Index, Elec	85	°C	UL 746B
Relative Temp Index, Mech w/impact	85	°C	UL 746B
Relative Temp Index, Mech w/o impact	85	°C	UL 746B
PHYSICAL			
Mold Shrinkage on Tensile Bar, flow (2) (5)	0.4 - 0.6	%	SABIC Method
Density	1.17	g/cm ³	ISO 1183
Water Absorption, (23°C/sat)	0.6	%	ISO 62
Moisture Absorption (23°C / 50% RH)	0.2	%	ISO 62
Melt Volume Rate, MVR at 260°C/2.16 kg	12	cm ³ /10 min	ISO 1133
ELECTRICAL			
Comparative Tracking Index (UL) (PLC)	0	PLC Code	UL 746A

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23±176;C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA All information, recommendation or advice given SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection

* Cycoloy is a trademark of SABIC Innovative Plastics IP BV

© 1997-2011 SABIC Innovative Plastics Holding BV. All rights reserved

Cycoloy* Resin C2950

Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
ELECTRICAL			
Volume Resistivity	>1.E+15	Ohm-cm	IEC 60093
Surface Resistivity, ROA	>1.E+15	Ohm	IEC 60093
Dielectric Strength, in oil, 0.8 mm	35	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 1.6 mm	25	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 3.2 mm	17	kV/mm	IEC 60243-1
Relative Permittivity, 1 MHz	2.7	-	IEC 60250
Dissipation Factor, 50/60 Hz	0.004	-	IEC 60250
Dissipation Factor, 1 MHz	0.006	-	IEC 60250
Comparative Tracking Index	600	V	IEC 60112
Relative Permittivity, 50/60 Hz	2.8	-	IEC 60250
FLAME CHARACTERISTICS			
UL Recognized, 94V-0 Flame Class Rating (3)	1.5	mm	UL 94
UL Recognized, 94-5VB Rating (3)	2.3	mm	UL 94
Glow Wire Flammability Index 960°C, passes at	1	mm	IEC 60695-2-12
Oxygen Index (LOI)	32	%	ISO 4589

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23±176;C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA All information, recommendation or advice given SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection

* Cycoloy is a trademark of SABIC Innovative Plastics IP BV

© 1997-2011 SABIC Innovative Plastics Holding BV. All rights reserved

Cycoloy* Resin C2950

Europe-Africa-Middle East: COMMERCIAL

PROCESSING PARAMETERS	TYPICAL VALUE	Unit
Injection Molding		
Drying Temperature	90 - 100	°C
Drying Time	2 - 4	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	250 - 280	°C
Nozzle Temperature	230 - 270	°C
Front - Zone 3 Temperature	240 - 280	°C
Middle - Zone 2 Temperature	230 - 270	°C
Rear - Zone 1 Temperature	210 - 240	°C
Hopper Temperature	60 - 80	°C
Mold Temperature	60 - 90	°C

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23±176;C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA All information, recommendation or advice given SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection

* Cycoloy is a trademark of SABIC Innovative Plastics IP BV

© 1997-2011 SABIC Innovative Plastics Holding BV. All rights reserved

Cycloy* Resin C2950

Europe-Africa-Middle East: COMMERCIAL


CALCULATED FLOW LENGTH INDICATION

Moldflow® Radial Flow Analysis

Cycloy* C2950

Melt Temperature : 265°C

Mold Temperature : 75°C

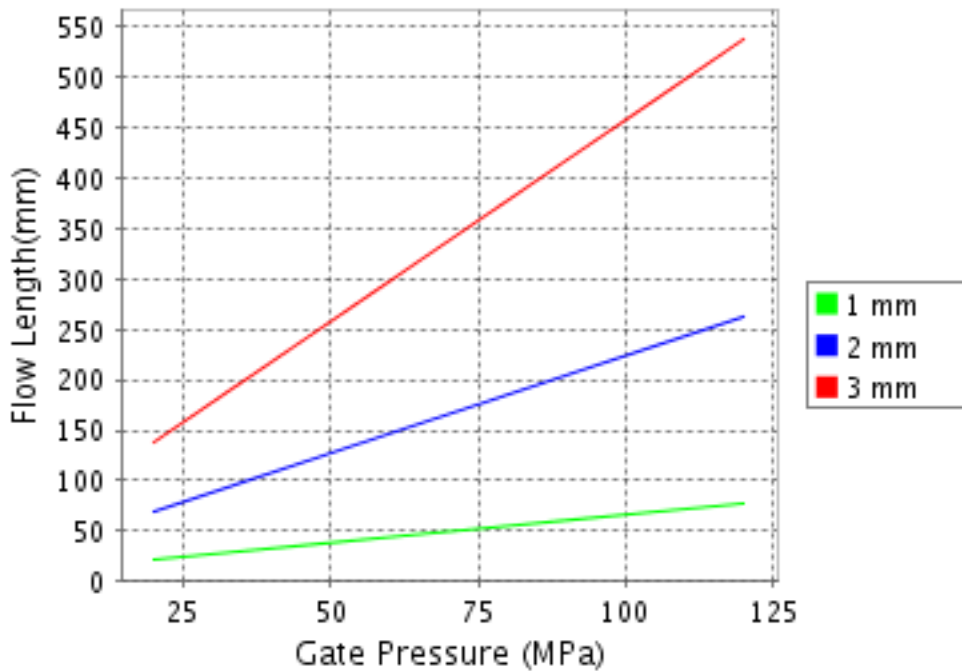

Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.

® Moldflow is a registered trademark of the Moldflow Corporation.

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23±1/76°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA All information, recommendation or advice given by SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products by the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection

* Cycloy is a trademark of SABIC Innovative Plastics IP BV

© 1997-2011 SABIC Innovative Plastics Holding BV. All rights reserved