

Noryl GTX* Resin GTX973

Europe-Africa-Middle East: COMMERCIAL

NORYL GTX973 is a material especially designed for electrostatic painting and powder coating applications. The material combines high heat resistance with impact and conductivity in a unique way.

TYPICAL PROPERTIES ¹	TYPICAL VALUE	UNIT	STANDARD
MECHANICAL			
Tensile Stress, yld, Type I, 50 mm/min	60	MPa	ASTM D 638
Tensile Stress, brk, Type I, 50 mm/min	55	MPa	ASTM D 638
Tensile Strain, yld, Type I, 50 mm/min	5	%	ASTM D 638
Tensile Strain, brk, Type I, 50 mm/min	55	%	ASTM D 638
Tensile Modulus, 50 mm/min	2200	MPa	ASTM D 638
Flexural Stress, yld, 1.3 mm/min, 50 mm span	90	MPa	ASTM D 790
Flexural Modulus, 1.3 mm/min, 50 mm span	2300	MPa	ASTM D 790
Tensile Stress, yield, 50 mm/min	60	MPa	ISO 527
Tensile Stress, break, 50 mm/min	55	MPa	ISO 527
Tensile Strain, yield, 50 mm/min	4	%	ISO 527
Tensile Strain, break, 50 mm/min	30	%	ISO 527
Tensile Modulus, 1 mm/min	2300	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	90	MPa	ISO 178
Flexural Modulus, 2 mm/min	2300	MPa	ISO 178
IMPACT			
Izod Impact, notched, 23°C	130	J/m	ASTM D 256
Izod Impact, notched, -30°C	80	J/m	ASTM D 256
Instrumented Impact Total Energy, 23°C	50	J	ASTM D 3763
Izod Impact, notched 80*10*4 +23°C	15	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*4 -30°C	7	kJ/m ²	ISO 180/1A
Charpy 23°C, V-notch Edgew 80*10*4 sp=62mm	15	kJ/m ²	ISO 179/1eA
Charpy -30°C, V-notch Edgew 80*10*4 sp=62mm	6	kJ/m ²	ISO 179/1eA

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.

3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.

4) Own measurement according to UL.

Source, GMD, Last Update:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA. All information, recommendation or advice given SABIC Innovative Plastics IP BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection.

* Noryl GTX is a trademark of SABIC INNOVATIVE PLASTICS HOLDING BV

© 1997-2009 SABIC INNOVATIVE PLASTICS HOLDING BV. All rights reserved

Noryl GTX* Resin GTX973

Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	UNIT	STANDARD
THERMAL			
Vicat Softening Temp, Rate B/50	200	°C	ASTM D 1525
HDT, 0.45 MPa, 3.2 mm, unannealed	195	°C	ASTM D 648
CTE, -40°C to 40°C, flow	8.5E-05	1/°C	ASTM E 831
CTE, -40°C to 40°C, xflow	9.E-05	1/°C	ASTM E 831
CTE, 23°C to 60°C, flow	9.E-05	1/°C	ISO 11359-2
CTE, 23°C to 60°C, xflow	9.E-05	1/°C	ISO 11359-2
Ball Pressure Test, 125°C +/- 2°C	PASSES	-	IEC 60695-10-2
Vicat Softening Temp, Rate B/50	195	°C	ISO 306
Vicat Softening Temp, Rate B/120	200	°C	ISO 306
HDT/Be, 0.45MPa Edgew 120*10*4 sp=100mm	190	°C	ISO 75/Be
PHYSICAL			
Specific Gravity	1.09	-	ASTM D 792
Mold Shrinkage, flow, 3.2 mm	1.4 - 1.7	%	SABIC Method
Mold Shrinkage, xflow, 3.2 mm	1.2 - 1.5	%	SABIC Method
Melt Flow Rate, 280°C/5.0 kgf	20	g/10 min	ASTM D 1238
Density	1.1	g/cm ³	ISO 1183
Water Absorption, (23°C/sat)	4.2	%	ISO 62
Moisture Absorption (23°C / 50% RH)	1.2	%	ISO 62
Melt Volume Rate, MVR at 280°C/5.0 kg	12	cm ³ /10 min	ISO 1133
ELECTRICAL			
Volume Resistivity	1.E+03 - 1.E+04	Ohm-cm	SABIC Method

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity.
All properties, except the melt volume rate are measured on injection moulded samples.
All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.
3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.
4) Own measurement according to UL.

Source, GMD, Last Update:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA All information, recommendation or advice given by SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products by the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection.

* Noryl GTX is a trademark of SABIC Innovative Plastics IP BV

© 1997-2009 SABIC Innovative Plastics IP BV. All rights reserved

Noryl GTX* Resin GTX973

Europe-Africa-Middle East: COMMERCIAL

PROCESSING PARAMETERS	TYPICAL VALUE	UNIT
Injection Molding		
Drying Temperature	100 - 120	°C
Drying Time	2 - 3	hrs
Maximum Moisture Content	0.07	%
Melt Temperature	290 - 320	°C
Nozzle Temperature	280 - 310	°C
Front - Zone 3 Temperature	290 - 320	°C
Middle - Zone 2 Temperature	280 - 300	°C
Rear - Zone 1 Temperature	260 - 280	°C
Hopper Temperature	60 - 80	°C
Mold Temperature	80 - 120	°C

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity.
All properties, except the melt volume rate are measured on injection moulded samples.
All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.
3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.
4) Own measurement according to UL.

Source, GMD, Last Update:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA All information, recommendation or advice given by SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products by the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection

* Noryl GTX is a trademark of SABIC Innovative Plastics IP BV

© 1997-2009 SABIC Innovative Plastics IP BV. All rights reserved

Noryl GTX* Resin GTX973

Europe-Africa-Middle East: COMMERCIAL


CALCULATED FLOW LENGTH INDICATION

Moldflow® Radial Flow Analysis

Noryl GTX® GTX973

Melt Temperature : 300°C

Mold Temperature : 100°C

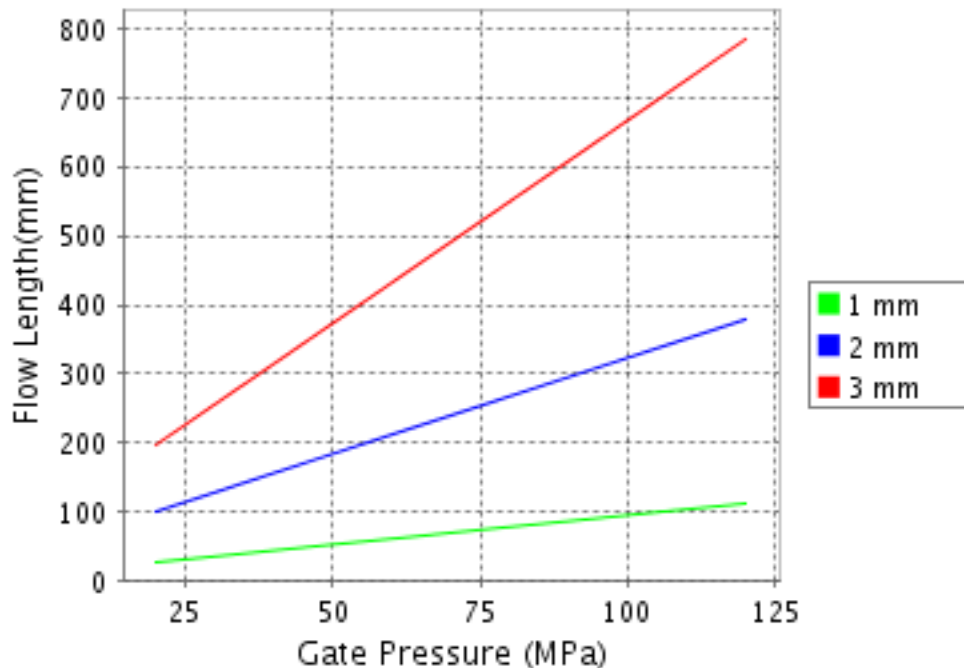

Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.

® Moldflow is a registered trademark of the Moldflow Corporation.

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.
3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.
4) Own measurement according to UL.

Source, GMD, Last Update:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA All information, recommendation or advice given by SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products by the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection

* Noryl GTX is a trademark of SABIC Innovative Plastics IP BV

© 1997-2009 SABIC Innovative Plastics IP BV. All rights reserved